



USE TO LOCATE PLAN SHEETS TOGETHER.

* FINE TUNE THRUST ANGLES WITH SHIMS BEHIND MOTOR PLATE.

* FINE FLEW QUITE FINE ON ONE LOOP OF 3/16 AND ONE LOOP OF 1/8. TRY WHAT YOU LIKE. (6" PROP.)

* NOTE COWL FLARE AT BOTTOM.

* DO NOT GLUE STRUTS FOR FLOAT GEAR OR WHEELED GEAR INTO LOCATING TUBES. THE GEAR IS MEANT TO BE INTERCHANGEABLE AND SHOULD FALL OUT SLIGHTLY ON NOT SO GOOD LANDINGS.

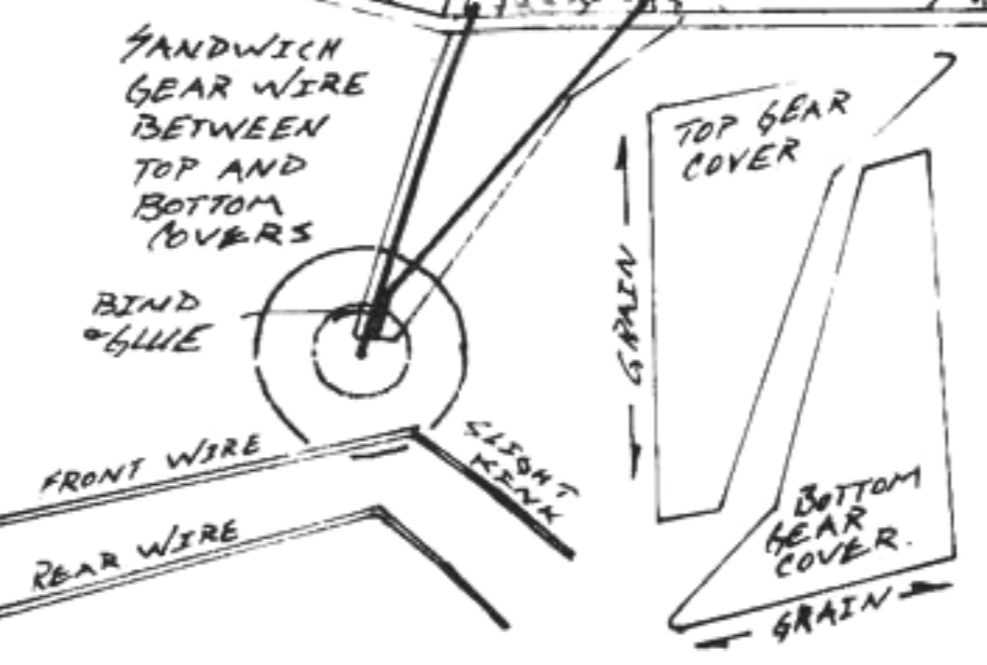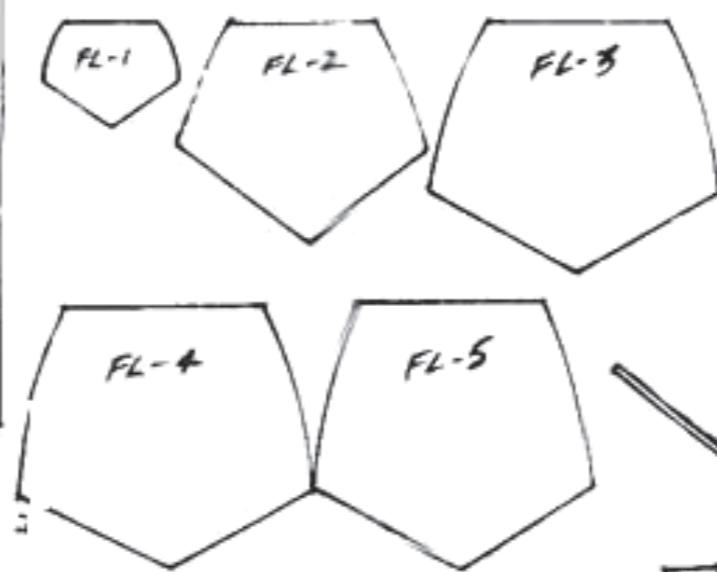

* ALL LONGERONS AND UPRIGHTS 3/32 SQUARE
* TOP STRINGERS 1/16
* BOTTOM STRINGERS 3/32

* GLUE STAB AT REAR ONLY. LEADING EDGE CAN BE SHIMMED AS NECC. * STAB MUST BE INSTALLED ON FUSE BEFORE TOP FUSE STRINGERS ARE GLUED SOLID AND FIN SPACER GLUED ON.

DHC-2 BEAVER		DEHAVILLAND AIRCRAFT OF CANADA	
SCALE: WHO KNOWS?	APPROVED BY: G/S/SPAN-22"	DRAWN BY: D.D.	
DATE: SEPT/08	LENGTH-14"	REVISED	
DOLLY DOBBY - OTHERWISE KNOWN AS HERMET. (WITH A LOT OF HELP FROM HIS FRIENDS).			
DRAWING NUMBER			